



# CEILING SYSTEMS



## CD60 CEILING SYSTEM



## Installation Guide

- The U28 runners are first fixed to the required ceiling levels.
- The hangers (seam / rod) are then fixed to the ceiling slabs at 1200 mm c.c.
- The CD60 (main channel) are then attached to the hangers and aligned to the required ceiling level at 1200mm c.c.
- The CD60 studs are then clipped to the main channels at 400 / 600mm c.c.
- The gypsum boards, cement boards or acoustic gypsum boards are longitudinally fixed with suitable fasteners to the CD60 at a distance of 250mm c.c.
- All joints are taped, and jointing compound is applied. Ceiling is finished smooth ready for painting.


## Description

CD60 Ceiling systems consist of durable, lightweight products suitable for the use in both direct fix and fully suspended concealed ceiling systems. The system is suitable for fixing gypsum boards, cement boards & acoustic gypsum boards.


Galvanization coating G40 (Z120). Standard profiles are produced in 3 meter length. Other galvanization coating requirements or lengths can be supplied upon minimum ordering quantity.

The system includes CD60, U28, gypsum boards / cement boards / acoustic gypsum boards etc. apart from the normal accessories like joint compound fillers, screws, nails etc.

# CD60 Ceiling System

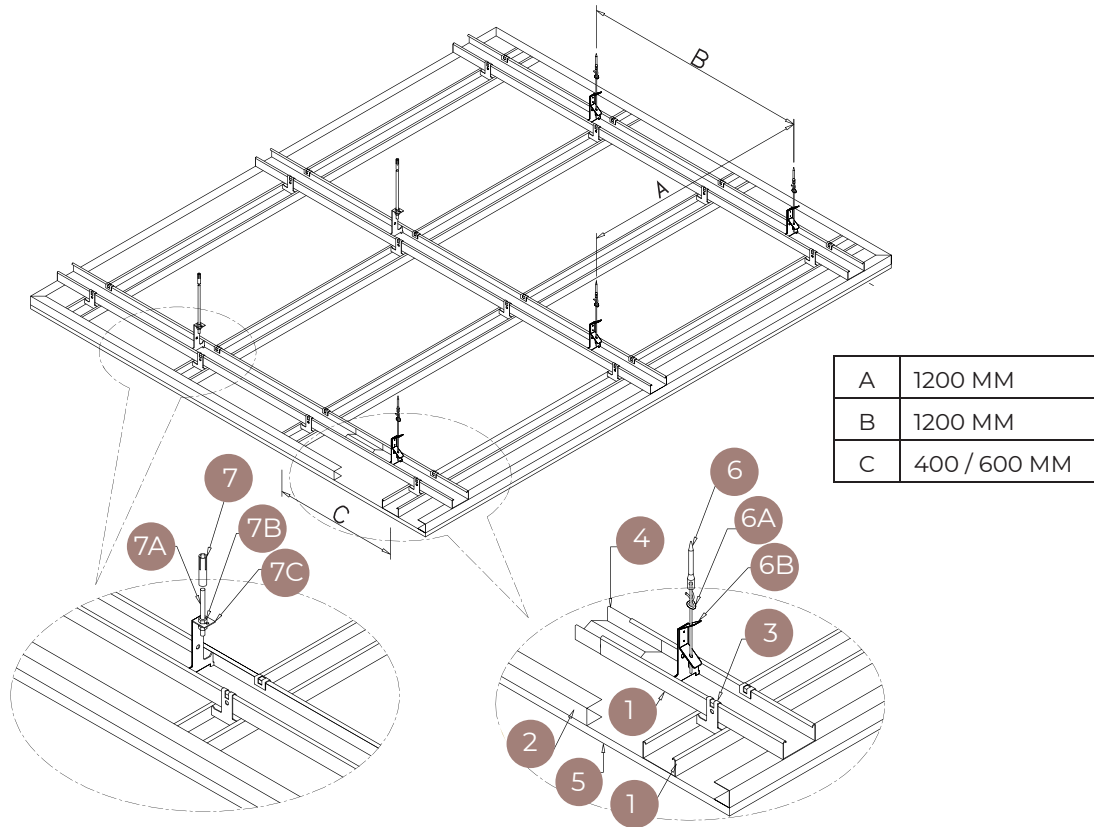

Item No.	Description	
1.	CD60 Stud	
2.	U28 Runner	
3.	Anchor Angle	
4.	CD Connector	
5.	Gypsum / Cement Board / Gypboard Acoustic	
6.	Ceiling Nail	Seam System
6A.	Seam	
6B.	CD Seam Bracket	
7.	Fisher Steel 6MM	Rod System
7A.	Threaded Rod 6MM	
7B.	Nut 6MM	
7C.	CD Rod Bracket	
8	Dry Wall Screws	

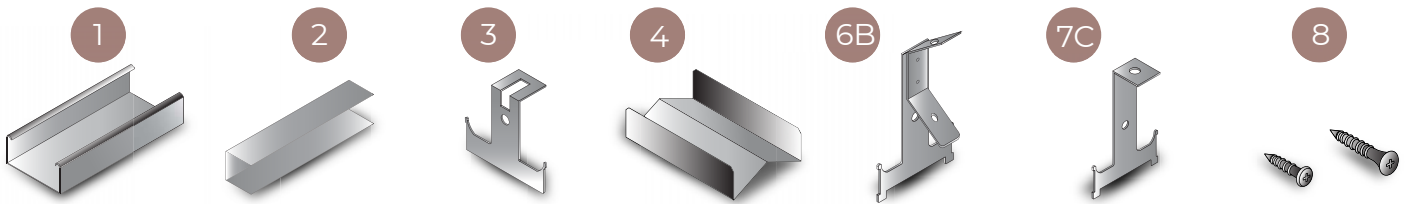

Profiles	Length (MM)	Dimension (MM)	Thickness (MM)	
			Standard	Special Order
CD60 Stud	3000	60 X 28	0.45	0.50 - 0.70
U28 Runner	3000	28 X 28	0.45	0.50 - 0.70

## CD60 CEILING SYSTEM



# CD60 CEILING SYSTEM



Metal Product Company's quality system for production and development is  
ISO 9001, 14001, 45001 Certified.



Metal Product Company many years of experience of the optimal utilization of our  
steel production system. We place this know how at the disposal of the building  
trade both through our printed information materials and personal advice  
given to the major projects



P. O. Box 3973, Safat 13040, State of Kuwait, Tel.: +965 2473 1287 / 2473 1291 / 2473 7916, Fax: +965 2473 7932

Email: [sales@mpckw.com](mailto:sales@mpckw.com) / [info@mpckw.com](mailto:info@mpckw.com)

[www.mpckw.com](http://www.mpckw.com)